


Nordic Ecolabelling of
Floor coverings



Version 5.1 • 12 October 2010 – 31 December 2014

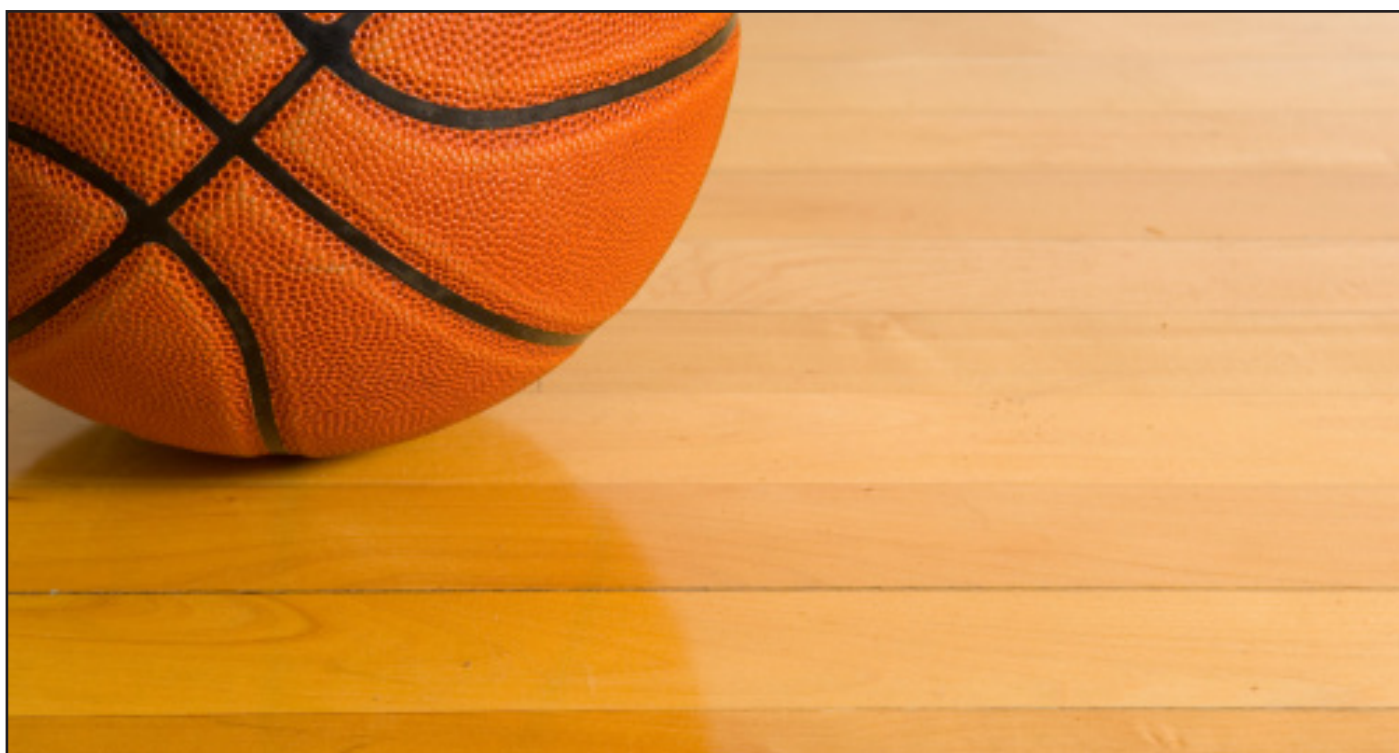

Nordic Ecolabelling

Content

Why choose the Nordic Ecolabel?	3
What can carry the Nordic Ecolabel?	3
How to apply	3
What are the requirements of Nordic Ecolabelling?	5
1 Requirements on raw materials	5
1.1 Wood raw materials and bamboo	5
1.2 Textile fibres and foam	6
2 Requirements on chemical products	9
3 Requirements on raw materials and energy	12
4 Requirements on waste management in floor covering production	15
5 Product requirements	15
6 Quality and regulatory requirements	17
Design of the Nordic Ecolabel	19
Follow-up inspections	19
How long is a licence valid?	19
New criteria	20

Appendix 1	Marketing of Nordic Ecolabelled floor coverings
Appendix 2	Analysis and test laboratories
Appendix 3	Energy content of fuel
Appendix 4	Requirement of forest certification
Appendix 5a	Specification of wood raw materials and bamboo (supplier)
Appendix 5b	Specification of wood raw material and bamboo in the floor covering (summary)
Appendix 6	List of azo-based pigments that may produce one or several carcinogenic arylamines

029 Floor coverings, version 5.1, 15 November 2012

This document is a translation of an original in Swedish. In case of dispute, the original document should be taken as authoritative.

Addresses

In 1989, the Nordic Council of Ministers decided to introduce a voluntary official ecolabel, the Swan. These organisations/companies operate the Nordic ecolabelling system on behalf of their own country's government. For more information, see the websites.

Denmark

Ecolabelling Denmark
Danish Standards Foundation
Kollegievej 6
DK-2920 Charlottenlund
Phone +45 72 300 450
Fax +45 72 300 451
E-mail: info@ecolabel.dk
www.ecolabel.dk

Norway

Ecolabelling Norway
Tordenskiolds gate 6 B
NO-0160 Oslo
Phone +47 24 14 46 00
Fax +47 24 14 46 01
E-mail: info@ecolabel.no
www.ecolabel.no

Iceland

Ecolabelling Iceland
Umhverfisstofnun
Suðurlandsbraut 24
IS-108 Reykjavik
Phone +354 591 20 00
Fax +354 591 20 20
E-mail: svanurinn@ust.is
www.svanurinn.is

Sweden

Ecolabelling Sweden
SE-118 80 Stockholm
Phone +46 8 55 55 24 00
Fax +46 8 55 55 24 01
E-mail: svanen@ecolabel.se
www.ecolabel.se

Finland

Ecolabelling Finland
Box 489
FIN-00101 Helsingfors
Phone +358 424 2811
Fax +358 424 281 299
E-mail: joutsen@motiva.fi
www.ecolabel.fi

This document may only be copied in its entirety and without any kind of alteration. It may be quoted from provided that Nordic Ecolabelling is stated as the source.

Why choose the Nordic Ecolabel?

- The floor covering manufacturer and flooring reseller may use the Nordic Ecolabel trademark for marketing. The Nordic Ecolabel, the Swan, is a very well-known and well-reputed trademark in the Nordic region.
- The Nordic Ecolabel is a cost-effective and simple way of communicating environmental work and commitment to customers and suppliers.
- Reducing environmental impact often creates scope for lowering costs, such as by cutting the consumption of energy and reducing amounts of packaging and waste.
- Environmentalised operations prepare the floor covering manufacturer for future environmental legislation.
- Environmental issues are complex. It can take a long time and extensive resources to gain an understanding of a specific area. Nordic Ecolabelling can be seen as an aid in this work.
- The Nordic Ecolabel not only covers environmental issues but also quality requirements, since the environment and quality often go hand in hand. This means that a Nordic Ecolabel licence can also be seen as a mark of quality.

What can carry the Nordic Ecolabel?

Examples of floor coverings that can be Nordic Ecolabelled include bamboo flooring, solid wood, parquet, laminate, linoleum and carpeting.

The floor covering must be intended for indoor use and suitable for a concrete, timber joist or similar subfloor. The floor covering shall not have a supporting function. Floor coverings with integrated heating cannot be Nordic Ecolabelled.

Seamless floor coverings that are applied as a curing liquid cannot be ecolabelled. Mineral floor coverings such as stone and clinker cannot be Nordic Ecolabelled but can be awarded the EU Ecolabel.

How to apply

Each requirement is marked with the letter R (requirement) and a number. All applicable requirements must be fulfilled for the award of a licence.

The requirements section can also be used as a checklist. Each requirement is followed by two checkboxes – Yes and No – to indicate whether the requirement is met.

Icons in the text

The text describes how the applicant shall demonstrate fulfilment of each requirement. There are also icons in the text to make this clearer. These icons are:

- ☒ Specifies which documents/data that shall be enclosed with the application.
- 📍 Requirement checked on site

Application

The application shall be sent to Nordic Ecolabelling in the country in which the floor covering is sold. See page 2 for addresses. The documents required for application are an application form and documentation demonstrating fulfilment of the requirements (specified in the criteria).

Further information and assistance may be available. Visit the Web site of the national ecolabelling body for more information.

Sales in other Nordic countries

Registering a licence in another Nordic country allows the Nordic Ecolabel to be used on a larger market. The following must be submitted to Nordic Ecolabelling:

- Form for sales in the country in question.
- Production information in the local language (see R24).
- Registration number for a national product and packaging recycling system or other documentation demonstrating fulfilment of recycling system requirements (see R31).

Registration is free of charge but an annual fee shall be paid in accordance with the national regulations.

On-site inspection

During the application process, Nordic Ecolabelling performs an on-site inspection to ensure adherence to the requirements. For this inspection, data used for calculations, original copies of submitted certificates, test records, purchase statistics, and similar documents that support the application must be available for examination.

Costs

An application fee is charged to companies applying for a licence. There is an additional annual fee based on the revenues produced by the floor covering carrying the Nordic Ecolabel.

Enquiries

Please contact Nordic Ecolabelling if you have any queries or require further information. See page 2 for addresses.

What are the requirements of Nordic Ecolabelling?

1 Requirements on raw materials

Are the requirements met?

R1 Renewable raw materials

Yes No

At least 50% by weight of the floor covering must comprise of renewable raw materials. Renewable raw materials are defined as those materials that are derived from biological materials that are continually reproduced in nature.

Describe the product and the materials of which the floor covering is made.

- Summary of the raw materials used to make the floor covering and their proportions (% by weight). Specification of which raw materials are renewable.

Appendix no. _____

1.1 Wood raw materials and bamboo

Are the requirements met?

R2 Wood raw material and bamboo

Yes No

The licence holder shall ensure that the wood raw materials and bamboo are legally felled/harvested and shall not derive from forest environments, natural environments or agricultural areas with high bio and/or social protective values. If it is shown that wood raw materials or bamboo is used that is derived from these forest environments, natural environments or agricultural areas Nordic Ecolabelling can revoke the licence.

- Name (in Latin or a Nordic language) plus geographical origin (country/federal state and region/province/municipality) for the type of wood used. Nordic Ecolabelling has the right to demand further documentation if it is uncertain whether the wood raw materials or the bamboo derive from forest environments, natural environments or agricultural areas with high bio and/or social protective values. Appendices 5a and 5b are intended for documentation of wood raw materials and bamboo.

Appendix no. _____

R3 Wood from certified forests

Yes No

This requirement applies to floor coverings that contain a minimum of 10% wood raw material by weight.

The requirement includes wood raw material but not bamboo.

At least 30% (annual average) of the wood must come from certified forests. Certification must be administered by a third party in accordance with a forestry standard that fulfils the requirements in Appendix 4 on standards and certification systems. The wood raw material must be traceable.

Materials/boards that are labelled according to "Nordic Ecolabelling of panels for the building, decorating and furniture industry" fulfil the requirements on wood raw materials.

- Specification of the percentage of wood raw material originating from certified forests and background data. Appendix 5a can be used by the supplier and 5b can be used for the summary of wood raw materials in the floor covering. Copy of the certificate for certified forest environments both signed and approved by the certification body. The name of the forest certification system must be clear. Details of ecolabelled panels and boards are sufficient evidence.

Appendix no. _____

- To ensure that all requirements regarding standards, certification systems and certified amounts are fulfilled, the ecolabelling body may request further documentation, such as a copy of the certification body's final report or copy of the forestry standard including the name, address and telephone number of the organisation that established the standard and references to those individuals representing parties and interest groups invited to take part in the development of the forestry standard.

Appendix no. _____

1.2 Textile fibres and foam

Are the requirements met? Yes No

These requirements apply to textile fibres that constitute more than 15% by weight of the floor covering (normally carpets). At least 80% of the fibre content must fulfil the following requirements:

R4 Plant fibres (linen, hemp, coconut and similar)

Yes No

During retting, the emission of oxygen demanding substances shall be reduced by 75%:

- in comparison to untreated emissions, measured in TOC or COD in internal/external treatment facilities, or
- through internal actions that limit emissions.

This requirement does not apply to ground retting and mechanical methods.

Information on analysis laboratories and test methods can be found in Appendix 2.



Evidence of a reduction of emissions shall be provided in a laboratory report. For option b), a declaration from an independent body certifying the effect of the purification methods is accepted. If the plant fibre has been awarded the Nordic Ecolabel or EU Ecolabel for textiles it fulfils these requirements.

Appendix no. _____

R5 Wool fibre – biocides

Yes No

The content of biocides must not exceed a total of 0.5 ppm for group A substances, 2 ppm for group B substances, 0.5 ppm for group C substances and 2 ppm for group D substances.

Group	Biocide	CAS no.
A	α - hexachlorocyclohexane	319-84-6
A	β - hexachlorocyclohexane	319-85-7
A	γ - hexachlorocyclohexane (lindane)	58-89-9
A	δ - hexachlorocyclohexane	319-86-8
A	Aldrin	309-00-2
A	Dieldrin	60-57-1
A	Endrin	72-20-8
A	P, p'-DDT	50-29-3
A	P, p'-DDD	72-54-8
B	Propetamphos	31218-83-4
B	Diazinon	333-41-5
B	Dichlofenthion	97-17-6
B	Fenchlorphos	299-84-3
B	Chlorfenvinphos	470-90-6
C	Cyhalothrin	68085-85-8
C	Cybermethrin	52315-07-8
C	Deltamethrin	52918-63-5
C	Fenvalerate	51630-58-1
C	Flumethrin	69770-45-2
D	Diflubenzuron	35367-38-5
D	Triflumuron	64628-44-0

Information on analysis laboratories and test methods can be found in Appendix 2.

- ☒ Certification that the listed biocides are not used or documentation from the wool supplier. Appendix no. _____
 - ☒ Wool supplier: The documentation of the levels of biocides is dependent on the producer's knowledge and control of the wool delivery. Biocide levels can be documented in two ways: Appendix no. _____
 - ☒ Analysis report (see Appendix 2) for the listed substances submitted to the ecolabelling body once a year and when suppliers are changed. Appendix no. _____
 - ☒ If the applicant has full control over wool production, an analysis report and a description of how biocides are avoided is sufficient. Appendix no. _____
- The ecolabelling body determines whether sufficient evidence has been provided.**
- ☒ If production is biocide free but is uncertified, details of the supplier, rearing area and sufficient other information must be submitted to display that biocides are not used in wool production. This also applies to production methods that are undergoing a transition to organic production. Appendix no. _____
 - ☒ If wool production/animal husbandry is organic, a certificate or transaction certificate from a competent certification body shall be submitted. Appendix no. _____
 - ☒ This requirement (R5) is fulfilled if a carpet fulfils the requirements of Nordic Ecolabel or EU Ecolabel textile ecolabelling or the German GUT ecolabel. Appendix no. _____

R6 Wool fibre – emissions

Yes No

The emission of oxygen demanding substances (COD) in degreasing wastewater released into the sewage network must not exceed 60 g/kg untreated wool.

Wastewater must be purified from at least 75% of the annual average of oxygen demanding substances.

Information on analysis laboratories and test methods can be found in Appendix 2.

- ☒ Declaration regarding the purification of wastewater from oxygen demanding substances and details of the facility's annual wool production. If the wool fibre has been awarded the Nordic Ecolabel or the EU Ecolabel for textiles it fulfils these requirements. Appendix no. _____

R7 Synthetic fibres

Yes No

Synthetic fibres must comprise at least 50% recycled raw material or fulfil the requirements for the specific fibre type laid out in R8-R10. Recycled raw materials shall originate from a post-consumer product.

R8 Polyester fibre

Yes No

The quantity of antimony in the polyester fibre must not exceed 260 ppm. If antimony is not used in production, the applicant may label the product "antimony free" (or similar) beside the Nordic Ecolabel.

Information on analysis laboratories and test methods can be found in Appendix 2.

- ☒ The applicant must either provide evidence that antimony is not used or submit an analysis report for antimony levels. If the polyester fibre has been awarded the Nordic Ecolabel or EU Ecolabel for textiles it fulfils these requirements. Appendix no. _____

- R9 Polyamide fibre** Yes No
 The average annual emissions to air of nitrogen dioxide (N₂O) from the production of the monomer must not exceed 10 g/kg of finished polyamide 6 fibres or 50 g/kg of finished polyamide 6.6 fibres.
- Applicants must certify that this requirement is fulfilled. If the polyamide fibre has been awarded the Nordic Ecolabel or the EU Ecolabel for textiles it fulfils these requirements. Appendix no. _____
- R10 Polypropylene fibre** Yes No
 The use of lead-based pigments is prohibited.
- Emissions of NO_x and SO₂ from the production of PP (monomer production, polymerisation and granulation) must not exceed the limits listed in the table below.
- | | |
|-----------------|--------------|
| NO _x | 12 kg/ton PP |
| SO ₂ | 11 kg/ton PP |
- The fibre manufacturer must measure or calculate the quantities of NO_x and SO₂ emitted during PP production. Appendix no. _____
- R11 Auxiliary textile chemicals** Yes No
 This requirement applies to chemicals used to treat textile fibres. Other chemicals, such as those for cleaning production equipment, do not need to fulfil the requirement.
- Alkylphenolethoxylates (APEO), linear alkylbenzene sulfonates (LAS), bis (hydrogenated tallow alkyl) dimethyl ammonium chloride (DHTDMAC), distearyldimethyl ammonium chloride (DSDMAC), ditallow dimethyl ammonium chloride (DTDMAC), ethyl diamine tetracetate (EDTA) and diethylene triamine pentaacetate (DTPA) must not be used nor be an ingredient in any preparation or substance that is used.
- The chemical manufacturer must certify that this requirement is fulfilled. If the textile has been awarded the Nordic Ecolabel or the EU Ecolabel for textiles it fulfils these requirements. Appendix no. _____
- R12 Foam rubber (natural and synthetic latex) - emissions** Yes No
 Emissions to water from foam rubber production shall be purified to 90% of oxygen demanding substances (measured as COD or TOC). This may be performed at an on-site or external treatment facility. If the latex production facility is connected to an external treatment plant, the plant's average degree of purification for COD or TOC shall apply.
- Information on analysis laboratories and test methods can be found in Appendix 2.*
- Details of the facility's degree of purification. Appendix no. _____
- R13 Foam rubber (natural and synthetic latex) – 1.3-butadiene** Yes No
 The content of 1.3-butadiene must not exceed 1 mg/kg of latex.
- Test report for the content of 1.3-butadiene in the latex. Appendix no. _____
- R14 Foam rubber (polyurethane)** Yes No
 CFC, HCFC, HFC (hydrofluorocarbons) and methylene chloride must not be used for foaming.
- Applicants must certify that this requirement is fulfilled. Appendix no. _____

2 Requirements on chemical products

Are the requirements met?

These requirements apply to chemical products and substances that are used in or on the floor covering, such as adhesives and surface treatments.

R15 Toxic and ecotoxic substances

Yes No

Chemical products that are classified according to EU Directive 1999/45/EEC with amendments as carcinogenic (R45, R49, R40), toxic for reproduction (R60, R61, R62, R63), mutagenic (R46, R68) or toxic (R23-28) must not actively be added to the floor covering.

Raw materials classified as allergenic that are added to the floor covering must not exceed levels of 0.1% by weight in the finished floor covering.

Chemical products and substances must fill requirement a) or b).

- a) The floor covering must not contain chemical products that are classified as environmentally hazardous (R50, R50/R53, R51/53, R52/R53, R52, R53, R54, R55, R56, R58, R59).
- b) The total quantity of chemical substances classified as environmentally hazardous (R50, R50/R53, R51/53, R52/R53, R52, R53, R54, R55, R56, R58, R59) must not exceed 2% by weight of the floor covering. The quantity of each individual substance must not exceed 1% by weight of the floor covering.

Classification according to EU Dangerous Substance Directive 67/548/EEC and EU Dangerous Preparation Directive 1999/45/EC with amendments.

Note that the chemical producer is responsible for classification.

Chlorinated/brominated paraffins, halogenated flame retardants, organic tin compounds, phthalates and fluorinated compounds must not be actively added to the floor covering.

Cadmium (Cd), lead (Pb) and mercury (Hg) must not be actively added to the floor covering.

- | | | |
|-------------------------------------|---|--------------------|
| <input checked="" type="checkbox"/> | Some azo-based pigments that decompose producing carcinogenic arylamines (see Appendix 6) must not be used. MSDS/product sheet complying with Directive 2001/58/EC for the constituent chemicals. | Appendix no. _____ |
| <input checked="" type="checkbox"/> | The producer or supplier of the chemical products must provide a 16-point material safety data sheet. | Appendix no. _____ |
| <input checked="" type="checkbox"/> | The floor manufacturer and chemical manufacturer must certify that the quantity of environmentally hazardous substances does not exceed the limit. | Appendix no. _____ |
| <input checked="" type="checkbox"/> | The pigment manufacturer must certify that azo-based pigments that decompose to carcinogenic arylamines are not used. | Appendix no. _____ |
| <input checked="" type="checkbox"/> | Declaration from the floor manufacturer and chemical supplier that the substances listed above have not actively been added to the floor covering. | Appendix no. _____ |

R16 Chemical products for surface treatment

Yes No

Chemical products used for surface treatment (e.g. fillers, stains and varnishes) must fulfil either requirement a) or b).

- a) The total quantity of chemicals in the surface treatment product that are classified as dangerous for the environment (R50, R50/R53, R51/53, R52/R53, R52, R53, R54, R55, R56, R58, R59) must not exceed 5% by weight.
- b) The total quantity of chemicals in the surface treatment product that are classified as dangerous for the environment (R50, R50/R53, R51/53, R52/R53, R52, R53, R54, R55, R56, R58, R59) must not exceed 7 g/m² of floor covering. Calculated in wet state.

Classification according to EU Dangerous Substance Directive 67/548/EEC and EU Dangerous Preparation Directive 1999/45/EC with amendments.

- MSDS/product sheet complying with Directive 2001/58/EC for the chemical surface treatment products. Appendix no. _____
- The chemical manufacturer or supplier must certify that the surface treatment product complies with the limits for environmentally hazardous substances in surface treatments. Option b) requires details of how much surface treatment is applied to the floor covering. Appendix no. _____

R17 Antibacterial treatment

Yes No

It is forbidden to add biocides in the form of pure active substances or in the form of biocidal products to the floor covering with the aim of procuring a disinfectant or antibacterial treatment nor a disinfected or antibacterial surface.

- Statement from the flooring manufacturer that shows that the requirement has been fulfilled. Appendix no. _____

R18 Nanoparticles

Yes No

Nanometals, nanominerals, nanocarbon or nanofluorine compounds shall not be actively added to the floor covering.

Nanoparticles are defined in this case as microscopic particles where at least one of the dimensions is under 100nm. Examples of nanometals are nanosilver, nanogold and nanocopper. Traces of particles of nanosize, which have not been added to achieve a specific function in the product, are not included in the requirement.

- Report from the floor-covering producer that nanoparticles have not been used or attached documentation which clearly shows that the requirement has been fulfilled. Appendix no. _____

R19 Formaldehyde release from floor coverings

Yes No

A floor covering that has additives that contain formaldehyde or other substances that release formaldehyde must fulfil requirement a) or b).

- a) Testing of formaldehyde emissions from the finished floor covering. Emissions to air must be less than 0.13 mg/m³ air. Testing shall follow the chamber method according to EN 717-1.
- b) For floor coverings that contain chipboard or fibreboard (e.g. MDF), this requirement can be fulfilled by testing according to the "perforator method" described in EN 120.

The following limits must be fulfilled:

Single test reading: ≤ 8 mg/100g dry test

Six-month average: ≤ 6.5 mg/100g dry test

Information on analysis laboratories and test methods can be found in Appendix 2.

Test report from the test above.

Appendix no. _____

Nordic Ecolabelled board fulfils the requirement.

Products with a valid licence/certificate for Danish or Norwegian "Inneklimamerke", Finnish Emission Classification of Building Materials, class M1, or Danish "Pladekontrol", class E1, fulfil the requirement.

R20 Organic solvent emissions

Yes No

This requirement does not apply to floor coverings that comprise more than 75% by weight of wood, and for which adhesives and surface treatment products contain a maximum of 1% by weight of organic solvents.

Organic solvents are defined as organic compounds that at 293.15 K have a vapour pressure of 0.01 kPa or greater.

The emission of organic solvents must not exceed 2 g/m² floor covering. The emission of organic solvents can be measured or calculated as a material ratio.

The annual average emission of organic solvents calculated as a methane equivalent detected with a flame ionization detector (FID). The emission figure for organic solvents shall be converted to an annual average per square metre of floor covering manufactured.

If the organic solvent emissions originate solely from the surface treatment, the quantity of organic solvents can be calculated using the following formula:

$$\frac{\text{Surface treatment (g/m}^2\text{)} \times \text{organic solvent content of surface treatment (\%)}}{\text{Efficiency of surface treatment}}$$

Efficiency of the surface treatment:

Automatic spray application, no recycling	50%
Automatic spray application with recycling	70%
Spray application, electrostatic	65%
Spray application, bell/disc	80%
Roller coating	95%
Curtain coating	95%
Vacuum coating	95%

Calculations demonstrating the fulfilment of the requirement.

Appendix no. _____

3 Requirements on raw materials and energy

Are the requirements met?

Requirements R19-R21 are designed for different types of floor covering. The requirements have two parts: The first part is a formula for the calculation of a points score. The requirement comprises equations in which various environmental parameters are weighted and totalled. The floor covering must exceed a certain limit to fulfil each requirement. Supplementary requirements and limits are also imposed on the parameters in the formula.

Requirements on raw materials

For wooden floor coverings, wood that is derived from certified forests scores highly. If the floor covering comprises 30% by weight of wood, at least 30% of the wood raw material must come from sustainable forests (see R3). The proportion of wood raw material from certified, sustainable forest shall be calculated as an annual average.

For linoleum floor coverings and carpets, the use of renewable raw materials and recycled finite raw materials scores highly. An additional requirement is set that at least 50% of the floor covering must comprise of renewable raw materials. Recycled raw materials are defined as residual products from other industries and post-consumer products.

Energy consumption (electricity and fuel)

Low energy consumption and the use of renewable fuels score highly. Renewable fuel is defined as non-fossil fuels (peat is defined as a fossil fuel).

Energy consumption is calculated as an annual average of the energy consumed during the production process (excluding premises heating) from the raw material in bulk to the finished floor covering. This means, for example, that the energy calculation for wood-based products starts from the wooden logs.

For synthetic (non-renewable) raw materials, the calculations start from the production of the plastic monomer. The calculation shall not include the energy content of the raw material.

The energy calculation shall include at least 95% by weight of the raw materials' energy consumption. The energy required to manufacture adhesives and varnish shall not be included in the calculations.

Nordic Ecolabelling has chosen the units kWh/m², though calculations may also be made in MJ/m² (1 kWh=3.6 MJ).

The energy contents of various fuels are given in Appendix 3.

If the producer has an energy surplus that is sold as electricity, steam or heat, the sold quantity can be deducted from the fuel consumption. Only the fuel that is actually used in floor covering production shall be included in the calculations.

Electricity consumption refers to electricity purchased from an external supplier.

R21 Solid wood and laminate floor coveringsYes No

Environmental parameter	Requirement
A = Wood from certified, sustainable forest (%)	Min. 30%
B = Proportion of recycled wood raw materials (%)	-
C = Proportion of renewable fuels (%)	-
D = Electricity consumption (kWh/m ²)	Max. 20 kWh/m ²
E = Fuel consumption (kWh/m ²)	Max. 50 kWh/m ²

$$P = \frac{A}{25} + \frac{B}{25} + \frac{C}{25} + \left(4 - \frac{D}{5}\right) + \left(4 - \frac{E}{12,5}\right)$$

Requirement: $P \geq 8,5$ for bamboo flooring $P \geq 11.5$ for laminate flooring $P \geq 10.5$ for wood flooring

☒ Calculation of P as above.

Appendix no. _____

Wood raw material:

Wood raw material documented in accordance with R3.

If Nordic Ecolabelled wood-based boards are used, the minimum requirement for environmental parameter A is fulfilled. Figures higher than 30% must be documented as specified in R3.

Recycled wood raw materials:

Specify the proportion of recycled wood raw materials that the floor covering contains and the type of wood raw material. Wood raw material can only be classified as either recycled or originating from certified sustainable forests, not both.

Electricity and fuel consumption:

Specify the types of fuel that have been used in floor covering production during the last year, and which fuels are renewable. Appendix 3 contains standard values for various fuels. Specify how much electricity has been used and how much floor covering (m²) has been produced over the last year.

R22 Linoleum floor coveringsYes No

Environmental parameter	Requirement
A = Proportion of renewable raw materials and recycled non-renewable raw materials (%)	Min. 50 %
B = Proportion of renewable fuels (%)	-
C = Electricity consumption (kWh/m ²)	Max. 20 kWh/m ²
D = Fuel consumption (kWh/m ²)	Max. 50 kWh/m ²

$$P = \frac{A}{25} + \frac{B}{25} + \left(4 - \frac{C}{5}\right) + \left(4 - \frac{D}{12,5}\right)$$

Requirement: $P \geq 9.0$

☒ Calculation of P as above.

Appendix no. _____

Renewable raw materials/recycled non-renewable raw materials:

Detail the raw materials used in the floor covering in accordance with R1. Specify which materials are renewable and which non-renewable materials are recycled. Describe the recycling process.

Electricity and fuel consumption:

Specify the types of fuel that have been used in floor covering production during the last year. Appendix 3 contains standard values for various fuels. Specify how much electricity has been purchased and how much floor covering (m²) has been produced over the last year. Specify which fuels are renewable.

R23 Textile floor coverings

Yes No

Environmental parameter	Requirement
A = Proportion of renewable raw materials and recycled non-renewable raw materials (%)	Min. 50 %
B = Proportion of renewable fuels (%)	-
C = Electricity consumption (kWh/m ²)	Max. 20 kWh/m ²
D = Fuel consumption (kWh/m ²)	Max. 50 kWh/m ²

$$P = \frac{A}{25} + \frac{B}{25} + \left(4 - \frac{C}{5}\right) + \left(4 - \frac{D}{12,5}\right)$$

Requirement: $P \geq 9.0$



Calculation of P as above.

Appendix no. _____

Renewable raw materials/recycled non-renewable raw materials

Detail the raw materials used in the floor covering in accordance with R1. Specify which materials are renewable and which non-renewable materials are recycled. Describe the recycling process.

Electricity and fuel consumption:

Specify the types of fuel that have been used in floor covering production during the last year. Appendix 3 contains standard values for various fuels. Specify how much electricity has been purchased and how much floor covering (m²) has been produced over the last year. Specify which fuels are renewable.

Example of calculations for a wooden floor covering:

A = Wood from certified, sustainable forest: 55%.

B = Recycled wood raw materials: 0%.

C = Proportion of renewable fuels: 95%.

D = Electricity consumption: 5 kWh/m².

E = Fuel consumption: 15 kWh/m².

$$P = \frac{55}{25} + \frac{0}{25} + \frac{95}{25} + \left(4 - \frac{5}{5}\right) + \left(4 - \frac{15}{12,5}\right) = 11,8$$

The floor covering fulfils the requirement.

4 Requirements on waste management in floor covering production

Are the requirements met?

R24 Waste management

Yes No

Waste from production that has an energy content greater than 10 MJ/kg (2.78 kWh/kg dry test) must be recycled. Recycling means that the waste shall be reintroduced into production or used as a source of energy.

The floor covering shall be designed for handling in accordance with regulatory requirements in the Nordic region.

The floor covering must not be classed as special waste or require special waste treatment in any Nordic country.

Declaration from the floor covering manufacturer that production waste is recycled.

Appendix no. _____

Declaration from the floor covering manufacturer that the floor covering does not give rise to special waste or require special waste treatment in any Nordic country.

5 Product requirements

Are the requirements met?

R25 Durability

Yes No

Only those requirements relating to the specific type of floor covering need be fulfilled.

If the floor covering has been tested using a test method other than that specified below, the results may be accepted if they are deemed comparable by an independent body.

Classification of resilient, textile and laminate floor coverings (EN 685:2007):

Domestic:

Class 21: Moderate/light (bedroom).

Class 22: General/medium (other rooms, lounge).

Class 23: Heavy (hall).

Commercial/public:

Class 31: Moderate (e.g. office, hotel room, conference room)

Class 32: General (e.g. classroom, hotel).

Class 33: Heavy (e.g. schools, corridors, department stores).

Class 34: Very heavy.

Light industrial:

Class 41: Moderate (e.g. electronic manufacturers).

Class 42: Medium (e.g. warehouse).

Class 43: Heavy (e.g. warehouse, other production premises).

Classification of hard floor coverings:

Class 1: Bedroom (domestic).

Class 2: Other rooms (domestic).

Class 3: Office, classroom, cinema, restaurant.

Class 4: Lobby, corridor, department store.

Linoleum floor coverings

The floor covering must be Class 22 (General/medium) or higher.

If the floor covering combines transparent and patterned/coloured wear layers, these are counted as one wear layer.

Carpets

Classification according to EN 1307. Class 2 (general use) or higher.

Factory-varnished solid wood and parquet flooring

Tested according to NS3506/SS923551 (also known as the Frick-Taber test). Number of cycles until 50% of the varnish has been abraded from the test area:

Class 2: Less than 600 cycles

Class 3: 600 – (1,000) cycles

Class 4: 1,000 – (1,600) cycles

Class 5: 1,600 – (2,400) cycles

Class 6: 2,400 – (3,600) cycles

Class 7: 3,600 – (7,00) cycles

Class 8: At least 7,200 cycles

Alternatively ASTM D 4060:2007, "Standard Test Method for Abrasion Resistance of Organic Coatings by the Taber Abraser" or ISO 7784-2 "Paints and varnishes – Determination of resistance to abrasion – Part 2: Rotating abrasive rubber wheel method" can be used if they are adapted to the above requirement levels.

Factory-oiled and untreated solid wood and parquet flooring

The product must be supplied with floor care recommendations for maintaining durability.

Laminate floor coverings

Wear resistance shall be tested according to EN 13329:2008. The use area shall be classified in accordance with the standard, referring to EN 685:2007.

The floor covering must be Class 22 (General/medium) or higher.

Other floor coverings

The wear resistance of floor coverings other than those named above shall be tested using a method selected by an independent test institute specialised in wear testing floor coverings. The test method must take into account the intended use area of the floor covering.

☒ Test report from the independent test institute.

Appendix no. _____

R26 Product informationYes No

The following product information must be supplied with the Nordic Ecolabelled floor covering:

- Recommended subfloor. Recommended subfloor temperature and maximum relative humidity for laying the floor covering.
- Recommended adhesives for joining the floor covering and fixing it to the subfloor. If there are suitable Nordic Ecolabelled adhesives, these must be recommended. Methods of laying and joining the floor covering must also be recommended.
- A method for welding seams (if applicable).
- Recommended method of cleaning including cleaning agents. If there are suitable Nordic Ecolabelled cleaning agents, these must be recommended.
- Recommended methods of maintenance including maintenance preparations. If there are suitable Nordic Ecolabelled maintenance preparations, these must be recommended.
- Recommended care instructions for oiled and untreated wood floor covering (type/quantity of oil or varnish) to achieve the intended wear resistance.
- The use area of the floor covering. Refer to the classes listed under R23 or in standard EN 685:2007.
- The floor covering manufacturer must inform the customer of how to extend the life of the floor covering through refurbishing such as sanding and polishing.

Copy of the product information supplied to customers.

Appendix no. _____

6 Quality and regulatory requirementsAre the requirements met?

To ensure that Nordic Ecolabelled requirements are fulfilled, the following procedures must be implemented.

If the floor covering manufacturer's environmental management system is certified to ISO 14 001 or EMAS, where the following procedures are applied, it is sufficient if the accredited auditor certifies that the requirements are implemented.

R27 Laws and regulationsYes No

The licensee must guarantee adherence to safety regulations, working environment legislation, environmental legislation and conditions/concessions specific to the operations at all sites where the Nordic Ecolabelled product is manufactured.

No documentation is required, but Nordic Ecolabelling may revoke the licence if the requirement is not fulfilled.

R28 Nordic Ecolabel licence administratorYes No

The company shall appoint an individual responsible for ensuring the fulfilment of Nordic Ecolabel requirements, and a contact person for communications with Nordic Ecolabelling.

A chart of the company's organizational structure detailing who is responsible for the above.

Appendix no. _____

- R29 Documentation** Yes No
 The licensee must be able to present a copy of the application, and factual and calculation data supporting the documents submitted on application (including test reports, documents from suppliers and suchlike).
 🔍 Checked on site.
- R30 Planned changes** Yes No
 Written notice must be given to Nordic Ecolabelling of planned changes that have a bearing on Nordic Ecolabel requirements.
 Procedures detailing how planned changes are handled. Appendix no. _____
- R31 Unplanned nonconformities** Yes No
 Unplanned nonconformities that have a bearing on Nordic Ecolabel requirements must be reported to Nordic Ecolabelling in writing and journalled.
 Procedures detailing how unplanned nonconformities are handled. Appendix no. _____
- R32 Traceability** Yes No
 The licensee must have a traceability system for the production of the Nordic Ecolabelled floor covering.
 Description of/procedures for the fulfilment of the requirement. Appendix no. _____
- R33 Take-back system** Yes No
 Relevant national regulations, legislation and/or agreements within the sector regarding the recycling systems for products and packaging shall be met in the Nordic countries in which the Nordic Ecolabelled floor covering is marketed.
 Declaration from the applicant regarding adherence to existing recycling/ take-back agreements. Appendix no. _____
- R34 Marketing** Yes No
 Marketing of the Nordic Ecolabelled floor covering shall comply with "Regulations for the Nordic Ecolabelling of products" of 22 June 2011 or later version.
 Appendix 1 duly completed. Appendix no. _____

Design of the Nordic Ecolabel

Design of the Nordic Ecolabel:



Licence number

Each licence has a unique, six-digit licence number that must be displayed along with the label.

More information on the design of the label can be found in "Regulations for the Nordic Ecolabelling of products" of 22 June 2011 or later version.

Follow-up inspections

Nordic Ecolabelling may decide to check whether the floor covering fulfils Nordic Ecolabel requirements during the licence period. This may involve a site visit, random sampling or similar test.

The licence may be revoked if it is evident that the floor covering does not meet the requirements.

Random samples may also be taken in-store and analysed by an independent laboratory. If the requirements are not met, Nordic Ecolabelling may charge the analysis costs to the licensee.

How long is a licence valid?

Nordic Ecolabelling adopted version 5.0 of the criteria for floor coverings on 12 October 2010. The criteria are valid until 31 December 2013.

At the secretariat manager's meeting of 15 November 2012 it was decided to prolong the criteria with one year. The new version is 5.1 and it is valid until 31 December 2014.

An ecolabel licence is valid providing the criteria are fulfilled and until the criteria expire. The validity period of the criteria may be extended or adjusted, in which case the licence is automatically extended and the licensee informed.

Revised criteria shall be published at least one year prior to the expiry of the present criteria. The licensee is then offered the opportunity to renew their licence.

New criteria

The next revision of the criteria will evaluate the following areas:

- Formaldehydmission
- Emission during user phase
- Requirement of chemical products and chemical substances
- Percentage renewable raw materials and usage of recycled raw materials
- Requirement on energy consumption

Appendix 1 Marketing of Nordic Ecolabelled floor coverings

We hereby certify that we are well acquainted with the regulations governing the use of the Nordic Ecolabel, as detailed in "Regulations for the Nordic Ecolabelling of products" of 22 June 2011 or later version. We agree to follow these regulations when marketing the Nordic Ecolabelled floor covering.

Further, we confirm that we are familiar with the criteria document regarding the Nordic Ecolabelling of the floor covering.

We undertake to advise those individuals within the company involved in marketing the Nordic Ecolabelled floor covering of the criteria for the Nordic Ecolabelling of floor coverings and "Regulations for the Nordic Ecolabelling of products" of 22 June 2011 or later version.

Location and date	Company
Signature, contact person	
Clarification of signature	Phone
Signature, marketing manager	
Clarification of signature	Phone

In case of a change in personnel, a new declaration must be submitted to Nordic Ecolabelling.

Appendix 2 Analysis and test laboratories

Requirements on the analysis laboratory

The analysis laboratory used shall fulfil the general requirements of standard EN ISO 17025 or have official GLP status.

The applicant's own analysis laboratory/test procedure may be approved for analysis and testing if:

- sampling and analysis is monitored by the authorities, or
- the manufacturer's quality assurance system covers analysis and sampling and is certified to ISO 9001 or ISO 9002, or
- the manufacturer can demonstrate agreement between a first-time test conducted at the manufacturer's own laboratory and testing carried out in parallel at an independent test institute, and the manufacturer takes samples in accordance with a fixed sampling schedule.

Test methods

Formaldehyde

Test using the chamber method according to EN 717-1.

The content of formaldehyde can also be determined using the perforator method described in EN 120. The perforator method provides a correlation between the content of free formaldehyde, expressed in mg/100 g, and the emission level, expressed in ppm or mg/m³.

The requirements set out in R17 apply for wooden panels with a moisture content (H) of 6.5%.

If the wooden panels have a different moisture content that is between 3% and 10%, the perforator value shall be multiplied by a correction factor F which is calculated as follows:

For chipboard: $F = -0.133H + 1.86$ For MDF: $F = -0.121 H + 1.78$

Oxygen demanding substances (COD or TOC)

The emission of oxygen demanding substances shall be calculated as an annual average based on at least one representative average daily sample each week, if no other method is required by regulatory requirements on wastewater.

Wastewater samples shall be taken during active production periods. The dates and times for sampling shall therefore be reported.

Test data regarding oxygen demanding substances in wastewater must be recorded for two months before a licence can be awarded. An annual average can be calculated from this data.

TOC: ISO 8245 "Water quality" or equivalent test method. "Guidelines for the determination of total organic carbon (TOC)".

COD: ISO 6060 "Water quality" or equivalent test method. "Determination of the chemical oxygen demand".

Analysis of biocide residues

Non-organic fibres: Biocide residues shall be determined using modified methods of US EPA 3540A "Soxhlet extraction", US EPA 3640A "Gel-permeation clean up" and US EPA 8270A "Semivolatile organic compounds by gas chromatography/mass spectrometry (GC/MS): capillary column technique".

Analysis of antimony

The following antimony analysis method must be used: direct determination by atomic absorption spectrometry. The analysis must be performed on virgin raw fibres prior to any wet treatment.

Analysis of butadiene

Determination of 1,3-butadiene in latex: Comminution and weighing of the sample. Testing with headspace sampler. Analysis by gas chromatography and detection by flame ionization detector.

Appendix 3 Energy content of fuel

The energy content of fuel is calculated based on the table below. If electrical energy is produced on-site, one of the following methods can be used for calculating fuel consumption:

- Actual annual consumption of fuel.
- Consumption of electricity produced on-site multiplied by 1.25.

Standard fuel values¹

(1 kWh = 3.6 MJ)

Fuel	Heat value MJ/kg	Heat value kWh/kg
Straw (15% W)	14.5	4.0
Pellets (7% W)	17.5	4.9
Waste wood (20% W)	14.7	4.1
Wood chips (45% W)	9.4	2.6
Peat	20	5.6
Waste	10	2.8
Natural gas	48.6	13.5
LPG	46	12.8
Eo1 oil	42.7	11.9
Eo5 oil	40.4	11.2
Power station coal	24.5	6.8
Coal, other	26.5	7.4
Natural gas	39.3 MJ/m ³	10.9 kWh/m ³
Eo1 oil	35.9 MJ/liter	10.0 kWh/liter

(% W) is the percentage by weight of water in the fuel and given the letter *f* in the formulas below. If nothing else is stated, *f* = 0% W and the ash content is average.

Formula for calculating the energy content of woodchips²:

The energy content of woodchips depends on the water content. An example of how to calculate the energy content of woodchips is given below.

The energy content of dry wood is 19.0 MJ/kg.

Energy is required to evaporate the water in the wood. This energy reduces the heat value of the woodchips. The energy content can be calculated as:

$19.0 \text{ MJ/kg} - 21.442 * f / 100 = \text{MJ/kg}$, where *f* is the water content in %W of the wood.

The factor "21.442" is the sum of water's heat of evaporation (2.442 MJ/kg) and the energy content of dry wood (19.0 MJ/kg).

If the applicant can refer to laboratory analyses of the heat value of a fuel, Nordic Ecolabelling may consider using this heat value for calculating the energy content.

¹ Statistics Norway: Energy statistics 1995. SFT report 9513: Incineration plants. Guide for officials and SFT: Emission coefficients (Audun Rosland, 1987).

² Reference: Centre for Biomass Technology, c/o dk-TEKNIK (tel. +45 39 555 999): Videnblad fact sheet 125.2 (in Danish) first published 29 June 1998, revised 26 March 1999.

Appendix 4 Requirement of forest certification

Wood used shall be certified by a third party in accordance with current forestry standards that fulfil the requirements on standards and certification systems.

The following requirements apply to standards, certification systems and certification bodies approved by Nordic Ecolabelling.

Standards

1. The standard must balance economic, ecological and social interests and comply with the UN Rio Declaration, Agenda 21 and the Statement of Forest Principles, and respect applicable international conventions and agreements.
2. The standard must contain absolute requirements. It must encourage and promote sustainable forestry.
3. The standard must be generally available. The standard must have been developed in an open process in which stakeholders with ecological, economic and social interests have been invited to participate.

Certification system

The certification system must be open, have wide-spread national or international credibility and be able to verify that the requirements in the forestry standard (see above) are fulfilled.

Certification body

The certification body must be independent and recognised. It must be able to verify that the requirements in the standard are met, able to communicate the results and be suitable for the efficient application of the standard.

Nordic Ecolabelling may request further documents to assess whether the requirements regarding standards and certification systems are met.

Appendix 5a Specification of wood raw materials and bamboo (supplier)

Supplier:
Product:
Manufacturer/supplier:

For the documentation of wood raw material and bamboo:

- Type of wood/type of bamboo and geographical origin (country/state and region/province/district) (applies to R2):
- Copy of certificate of forest certification (applies to R3).
- Quantity (%) of timber from certified forests used in the product (applies to R3):

The following table can be used if a supplier supplies more than one product:

Wood raw material/ bamboo	Type of wood/type of bamboo	Geographical origin	Forest standard	Quantity (%) of timber from certi- fied forests used in the product

Signature of supplier:	
Date	Company name
Administrated by	Telephone

Appendix 5b Specification of wood raw material and bamboo in the floor covering (summary)

Table 1: Timber/bamboo used (use the table if required)

Wood raw material/bamboo	Supplier	Type of wood/ type of bamboo	Geographical origin

Table 2: Timber from certified forests

Wood raw material	Supplier	Quantity	Quantity (%) of timber from certi- fied forests	Quantity of timber from certified forests
Total				

% timber from certified forests =

Quantity of timber from certified forests/total amount of timber used in the products = _____

Signature of supplier:	
Date	Company name
Administrated by	Telephone

Appendix 6**List of azo-based pigments that may produce one or several carcinogenic arylamines**

Name	CAS no.
4-Aminobiphenyl	92-67-1
Benzidine	92-87-5
4-Chloro-o-toluidine	95-69-2
2-Naphthylamine	91-59-8
o-Aminoazotoluene	97-56-3
5-Nitro-o-toluidine	99-55-8
p-Chloroaniline	106-47-8
4-Methoxy-m-phenylenediamine	615-05-4
4,4'-Methylenedianiline	101-77-9
3,3'-Dichlorobenzidine	91-94-1
3,3'-Dimethoxybenzidine	119-90-4
3,3'-Dimethylbenzidine	119-93-7
4,4'-Methylenedi-o-toluidine	838-88-0
6-Methoxy-m-toluidine	120-71-8
4,4'-Methylenebis(2-chloroaniline)	101-14-4
4,4'-Oxydianiline	101-80-4
4,4'-Thiodianiline	139-65-1
o-Toluidine	95-53-4
4-Methyl-m-phenylenediamine	95-80-7
2,4,5-Trimethylaniline	137-17-7
o-anisidin, 2-methoxyanilin	90-04-0
4-amino-azobenzen	60-09-03

Pigment
C.I.Basic Red 9
C.I.Disperse Blue 1
C.I.Acid Red 26
C.I.Basic Violet 14
C.I.Disperse Orange 11
C.I.Direct Black 38
C.I.Direct Blue 6
C.I.Direct Red 28
C.I.Disperse Yellow 3